


# JH9系列螺钉式组合型接线端子

## 产品概述

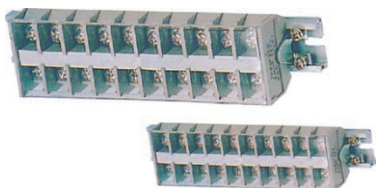


材料采用聚碳酸酯阻燃型，额定工作电压交流660V，压接技术采用片装组合螺钉压接技术，连接导线截面0.75~35mm<sup>2</sup>。导轨安装采用25mm的C型导轨。

## 技术参数

型号规格	外形尺寸mm				连接导线范围 mm <sup>2</sup>	额定电流 A	接线螺钉	配用端头
	B	H	厚	外形图				
JH9-1.5	32	31.5	8	1	0.75-1.0-1.5	17.5	M3	TU1-1/3 1.5/3 TO1-1/3 1.5/3
JH9-1.5ZG		32.5	2	2				
JH9-2.5	40	33.5	11	1	1.0-1.5-2.5	24	M4	TU1-1/4 TO1-1/4 TU1-1.5/4 TO1-1.5/4 TU1-2.5/4 TO1-2.5/4
JH9-2.5Z		35	12	3				
JH9-2.5ZG		33.5	2	4				
JH9-6	43	36.5	14	1	2.5-4-6	41	M5	TU1-2.5/5 TO1-2.5/5 TU1-4/5 TO1-4/5 TU1-6/4 TO1-6/4
JH9-6Z		38	15	3				
JH9-6ZG		36.5	2	4				
JH9-10	50	38.5	16.5	1	4-6-10	57	M6	TO1-4/6 TO1-6/6 TO1-10/6
JH9-10Z		40	17.5	3				
JH9-10ZG		38.5	2	4				
JH9-25	60	41.5	18.5	1	10-16-25	101	M6	TO1-10/6 TO1-16/6 TO1-25/6
JH9-25Z		43	19.5	3				
JH9-25ZG		41.5	2	4				

## JH9 结构特征尺寸



(1) JH9-□基型接线座



(2) JH9-1.5ZG终端隔板



(3) JH9-□Z终端接线座



(4) JH9-ZG终端隔板