

## BZM-10


系列防爆照明开关(ⅡB)



### 适用范围 Application

- 适用于1区、2区危险场所。
- 适用于ⅡA、ⅡB类，温度组别为T1~T6的爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2.
- Can be used in explosive gas atmospheres of Category IIA and 、ⅡB where the temperature classification is T1 ~ T6.

### 型号含义 Model implication

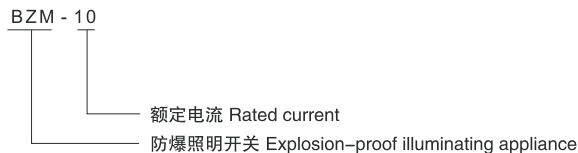

### 技术参数 Technical parameters

- |   |  |
|---|--|
| <ul style="list-style-type: none"> <li>■ 执行标准：GB 3836.1、GB 3836.2、GB 3836.3、IEC60079、GB12476.1</li> <li>■ 额定电压：AC 220V</li> <li>■ 额定电流：10A</li> <li>■ 防爆标志：Exde Ⅱ BT6 Gb/DIP A20TA,T6</li> <li>■ 防护等级：IP65</li> <li>■ 防腐等级：WF1</li> <li>■ 进线口螺纹：G3/4"</li> <li>■ 电缆外径：φ9mm~φ14mm</li> </ul> | <ul style="list-style-type: none"> <li>■ Implementing the standard : GB 3836.1、GB 3836.2、GB 3836.3、IEC60079、GB12476.1</li> <li>■ Rated voltage: AC220V</li> <li>■ Rated current: 10A</li> <li>■ Explosion-proof mark: Exde Ⅱ BT6 Gb/DIP A20TA,T6</li> <li>■ Protection grade: IP65</li> <li>■ Corrosion-proof grade: WF1</li> <li>■ Inlet thread: G3/4"</li> <li>■ Cable's outer diameter: φ9mm~φ14mm</li> </ul> |
|---|--|

### 产品特点 Features

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>■ 壳体采用ZL102铝合金压铸成型，表面粉末静电喷塑，结构紧凑，外形美观；</li> <li>■ 产品为复合型结构，增安型外壳内装防爆型开关；</li> <li>■ 产品具有防水、防尘等特点；</li> <li>■ 钢管或电缆布线。</li> </ul> | <ul style="list-style-type: none"> <li>■ The housing is die cast in aluminum alloy, with high voltage static plastic-sprayed surface.</li> <li>■ The product is of composite structure, with explosion-proof switch built in the increased safety type housing;</li> <li>■ Water-proof, dust-proof.</li> <li>■ Conduit wiring or cable wiring.</li> </ul> |
|---|---|

www. peopleex. cn

## BZM-10

Type explosion-proof illumination switch ( II B)

### 外形及安装举例 Outline and mounting example

