



# 绿电系列(1) LED投光灯

LED Floodlight

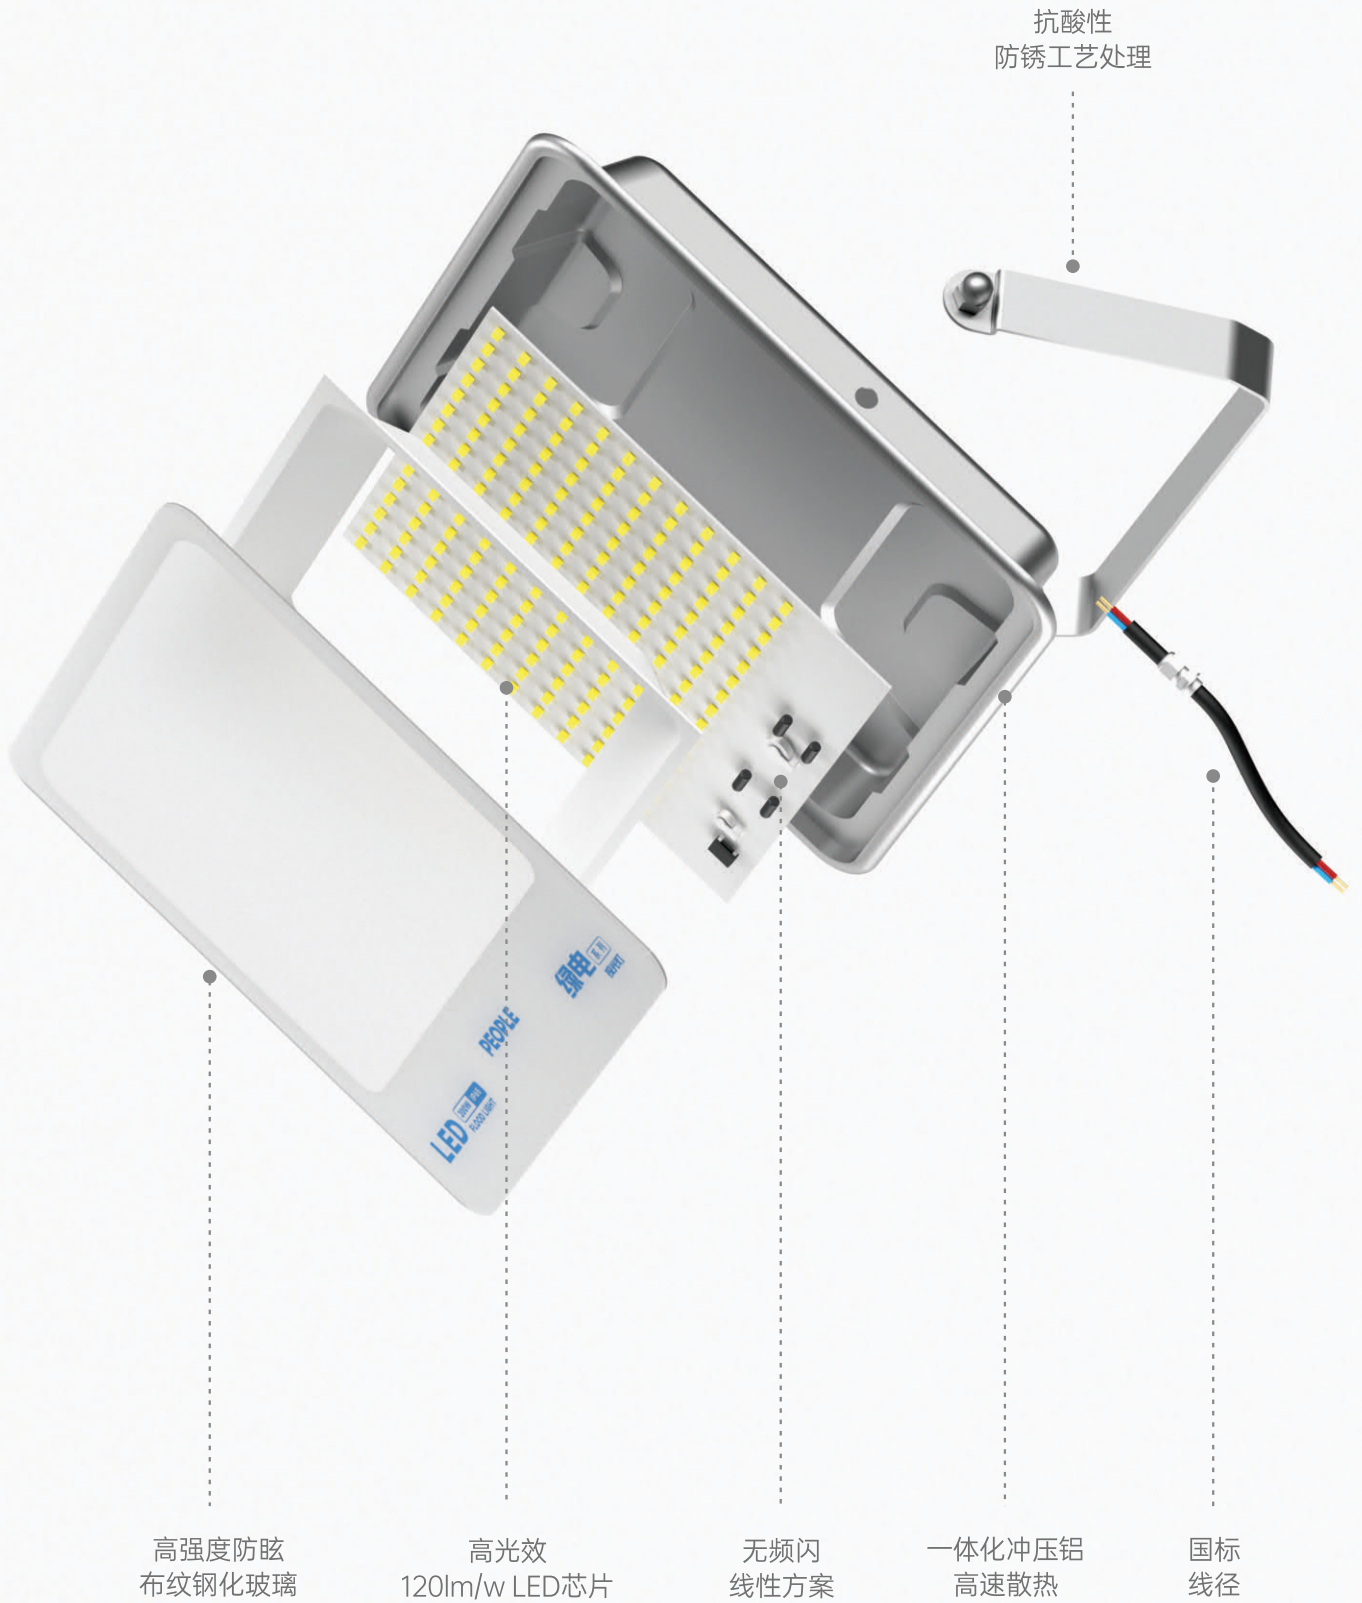

## IP65泛光

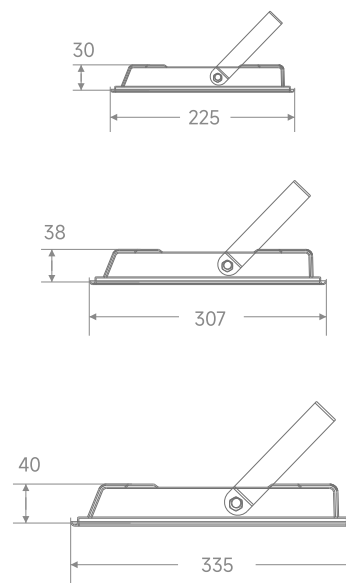

产品型号	功率	光通量(Lm)	工作温度	整灯尺寸mm	包装数量
G-TGD/绿电(1) L231-50W	50W	≥110lm/W	-40至+40	193x30x225	20pcs/箱 (独立内盒)
G-TGD/绿电(1) L276-100W	100W	≥110lm/W	-40至+40	257x38x307	12pcs/箱 (独立内盒)
TGD/绿电(1) L322-200W	200W	≥110lm/W	-40至+40	345x40x335	8pcs/箱 (独立内盒)
TGD/绿电(1) L445-400W	400W	≥110lm/W	-40至+40	445x38x500	4pcs/箱 (独立内盒)

LED性能稳定, 无频闪, 光线均匀柔和, 细腻自然, 健康护眼

色温: □ 6500K    SPD≥4000

