



标准规格


型号	RE3H110-06	RE3H210-08	RE3H310-08	RE3H310-10	RE3H310-15
工作介质	空气(经40 μm以上滤网过滤)				
动作方式	手控直动式				
*接管口径	06:G1/8	08:G1/4		10:G3/8	15:G1/28
有效截面积	14.0mm <sup>2</sup> (Cv=0.78)	16.0mm <sup>2</sup> (Cv=0.89)	25.0mm <sup>2</sup> (Cv=1.39)	30.0mm <sup>2</sup> (Cv=1.67)	50.0mm <sup>2</sup> (Cv=2.79)
位置数	三口二位				
**润滑	不需要				
使用压力范围	0~0.8MPa(~114psi)				
保证耐压力	1.2MPa(170si)				
工作温度 °C	-50~60				
本体材质	铝合金				

\*接管牙型有PT、NPT牙可供选择;  
\*\*如有加油润滑,中途不可停止,建议润滑油为ISO VG 32或同级用油。




符号




型号表示方法

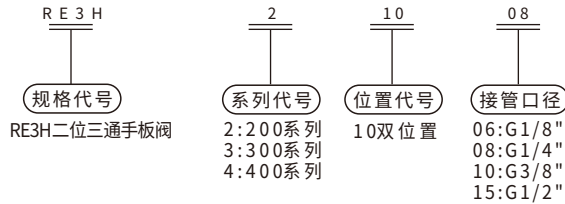

流量特性



外形尺寸图(毫米)

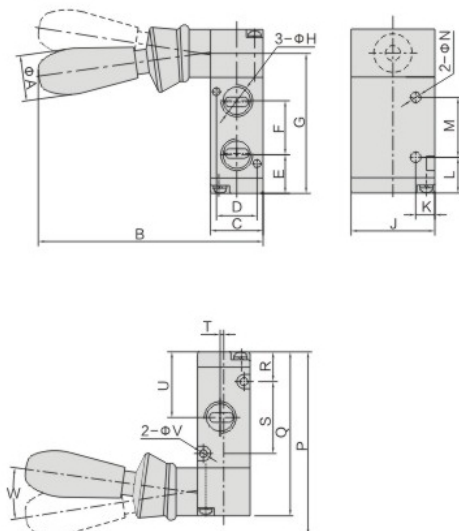

符号	型号	RE3H210		RE3H310		RE3H410
		06	08	08	10	15
A		19	19	19	19	19
B		94	94	98.4	98.4	105
C		22	22	27	27	34
D		17	17	20	20	27
E		16.2	16.2	20.3	20.3	23
F		22.5	22.5	24	24	36
G		58.4	58.4	67.3	67.3	84.5
H		G1/8	G1/4	G1/4	G3/8	G1/2
J		35	35	40	40	50
K		8	8	10	10	13.5
L		14.9	14.9	14.8	14.8	16
M		25	25	30	30	50
N		4.3	4.3	4.3	4.3	5.2
P		76.5	76.5	85.2	85.2	105
Q		68.4	68.4	77.3	77.3	95.5
R		12.4	12.4	14.8	14.8	19.5
S		30	30	35	35	43
T		0	1.5	0	2	3
U		27.4	27.4	32.3	32.3	41
V		3.2	3.2	4.3	4.3	4.3
W		16.8	16.8	16.5	16.5	22.3